

Sheds USA Inc. - Home Depot Shed specs

Roof Construction


7/16" OSB sheathing
 2x4 trusses w/TPI plates, 24" on center
 3ft, 3-tab, self-sealing asphalt shingles
 All Peak roof pitches are 5/12
 Gambrel roof pitch is 12/12 at bottom
 changing to 5/12 pitch at the top
 Gable vents are optional

Approx Roof Height

6ft wide peak - 8'*
 8ft wide peak - 8'4"*†
 8ft wide gambrel - 9'*
 10ft wide peak - 8'11"†
 10ft wide gambrel - 9'7"
 12ft wide peak - 9'8"†
 12ft wide gambrel - 10'3"
 *add 2" if 2x6 joists
 †add 2" more if ExPeak roof
 Add 15" to any roof height for 7ft walls

Walls

2x4 construction, 24" on center
 Siding Types:
 Pre-primed Shed panel
 Pine (1x6 horizontal tongue & groove)
 Cedar (1x6 horizontal tongue & groove)
 Vinyl Siding on 1/2" plywood
 Peak/ Gambrel std wall height - 71-1/2"
 Extended Peak front wall only height - 75"
 Optional 7ft walls are 86-1/2" tall

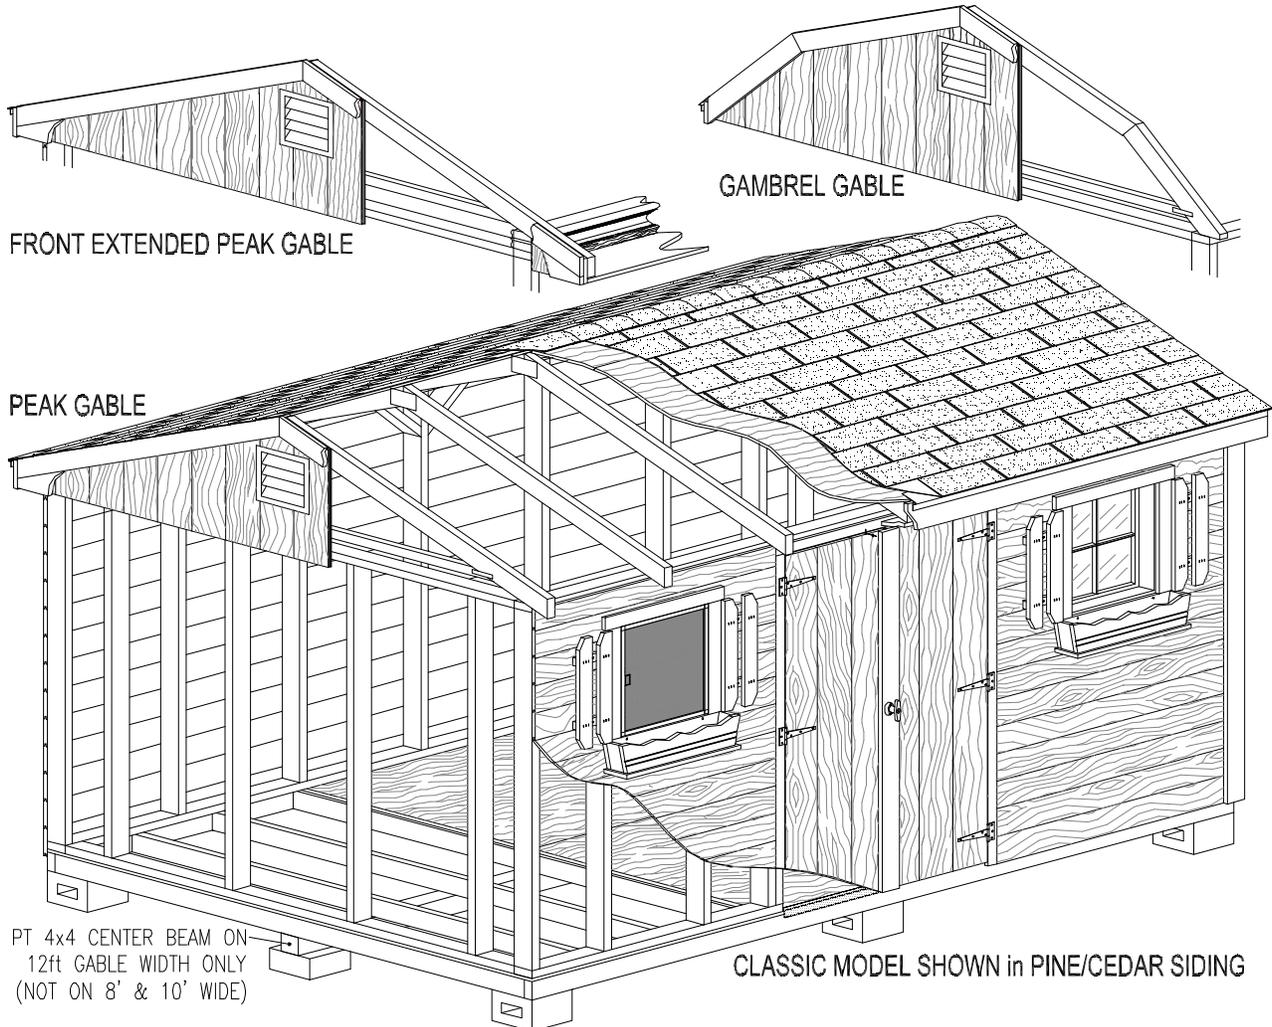

Windows

Size: 18" wide x 22" tall (approx)
 Includes flower box & shutters
 All windows are non-functional
 upgradeable to functional w/screen
 Wood sheds have pine windows
 Vinyl sheds have vinyl windows

Doors

Standard 40" double door (except 6'x6' shed)
 Optional 27", 54", & 66" doors
 Optional 66" or 96" roll-up door*
 Door height 68", opening height 66-1/2"
 opening width 1/2" less than door
 Door opening height on 7ft walls 80"
 *96" roll-up door only fits on 12' gambrels

Floor

standard is 5/8" OSB over 16"o.c joists
 PT 2x4 - 6' & 8' wide sheds
 PT2x6 - 10' & 12' wide sheds
 Tough Floor II option upgrades all
 your joists to PT 2x6 @ 12"o.c.
 with 5/8" PT plywood
 Concrete block supports
 PT 4x4 beam under 12' wides only

Note: Some options may not be available on all sheds. Call your Distributor or Sheds USA for more information.
 Please refer to our specific instructions & dimensions before beginning any slab, sonotubes (piers), gravel pad or other site preparation.