

Sheds USA Inc. Garden Hutch specs

Delivered - Built - Guaranteed

Roof Construction

7/16" Oriented Strand Board†
2x4 rafters 24" on center, 4ft span
3ft, 3-tab, self-sealing asphalt shingles
Roof pitch is 3/12 only
Optional gable vents available

Approx Roof Height

Joist to Peak – 93-1/2"*
with 2" blocks, 95-1/2"*
*add 2" more if 2x6 joists

Walls

2x4 construction, 24" on center

Siding Types:


Primed shed panel (requires painting)

Cedar (tongue & groove)

Maintenance-Free Vinyl on 1/2" plywood

Inside front wall height - 71-1/2"

Inside rear wall height – 83-1/2"

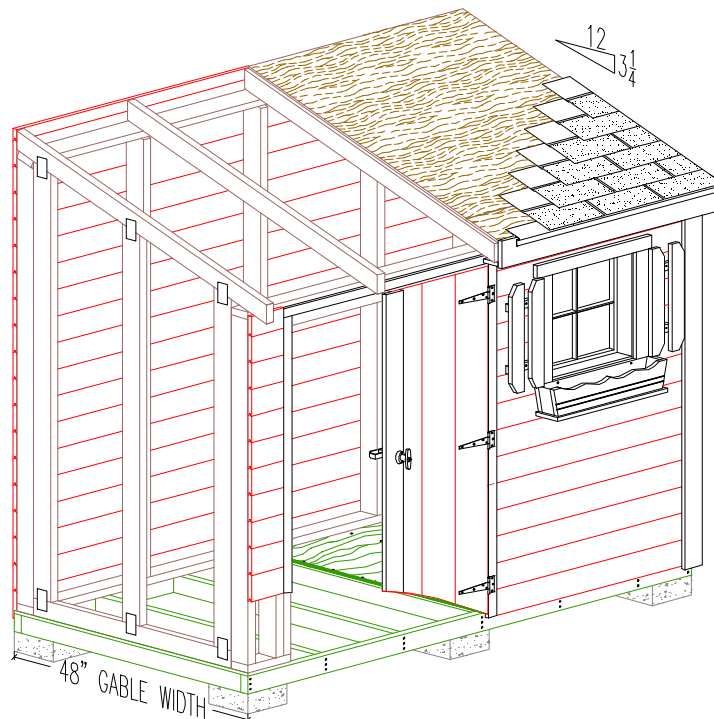

Non-functional Window

Placed on Front Wall Only
Size: 18" wide x 22" tall (approx)
Includes flower box & shutters
Optional functional window upgrade
Includes window screen

Doors – Front Wall Only

Standard 40" double door
Door height 68", opening height 66-1/2"
opening width is 1/2" less than door

Floor – 4ft width only

standard floor is PT 2x4s 16"o.c.
with 5/8" Oriented Strand Board†
Tough Floor II option upgrades
your floor joists to 2x6 @ 12"o.c.
with 5/8" PT plywood
Concrete block supports

Note: †Specs may vary by Distributor/area. Call your Distributor or Sheds USA for more information.

Please refer to our specific instructions & dimensions before beginning any slab, sonotubes (piers), gravel pad or other site preparation.